


# MAXX 2507



4 - 14 years

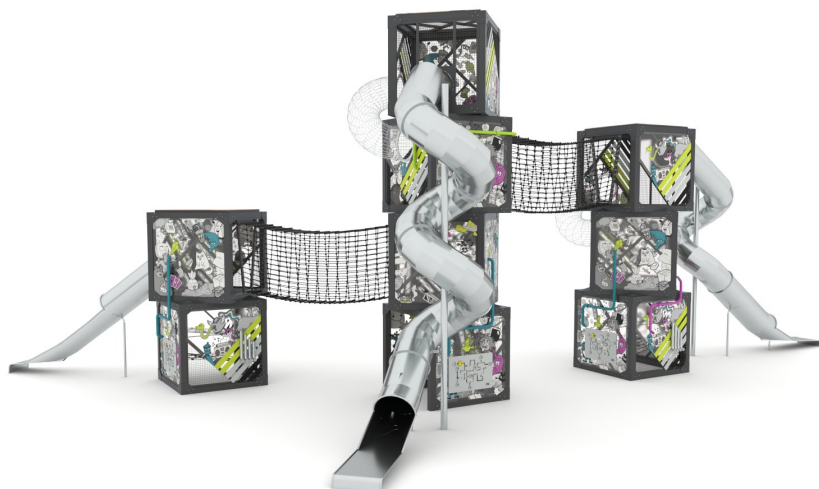

135 kids



137,3 m<sup>2</sup>



## Material specification

- Hot-dip galvanized and powder coated construction of 140x140 mm profile,
- Platforms made of durable anti-slip and waterproof HPL plate,
- Transparent polycarbonate panels with a weather-resistant print,
- Covers made of hot-dip galvanized and powder coated steel mesh,
- Side panels made of durable HPL plate, resistant to weather conditions,
- Stainless steel tube slide,
- Moving elements made of durable HPL plate, resistant to weather conditions,
- Spherical windows made of polycarbonate,
- Musical panels made of stainless steel pipes, with a paddle made of certified, safe rubber attached,
- "Talking pipe" - a pipe made of hot-dip galvanized and powder-coated steel,
- Steel ropes in polypropylene braid, connected with durable plastic elements, stainless steel or aluminum,
- Calibrated stainless steel chains, preventing fingers entrapment,
- Stainless steel screws and/or screws covered with plastic caps,



### Facilitating disability



sound stimulation



shelters



integration



### Intellectual development



manipulation



music



thinking



### Physical development



sliding



climbing





**3**  
number of  
slides



**7**  
number of  
interactive  
elements



**15**  
number of activity  
elements

## Product technical sheet

# MAXX 2507


### Product data

|                                |                                 |
|--------------------------------|---------------------------------|
| Length                         | 2300 cm                         |
| Width                          | 1405 cm                         |
| Total height                   | 890 cm                          |
| Age group                      | 4 - 14 years                    |
| Number of users                | 135 kids                        |
| Safety zone                    | 137,3 m2                        |
| Free fall height               | 150 cm                          |
| The height of the platforms    | 235, 235, 235, 455, 455, 675 cm |
| tube slide platform height     | 235, 560, 675 cm                |
| In accordance with norm EN     | 1176-1:2017+A1:2023             |
| Weight of the heaviest part    | 216 kg                          |
| Dimensions of the largest part | 498x327x86 cm                   |
| Availability of spare parts    | YES                             |
| Installation time              | 18 h                            |



Data is subject to change without prior notice.

### Additional information

- equipment adapted for the disabled; intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jamming the head, fingers or any other body parts;
- anchoring on flat surface, 80/70/60 cm deep;
- slide should not be installed southwards;
- render is for reference only, the actual appearance of the equipment and its color may vary;

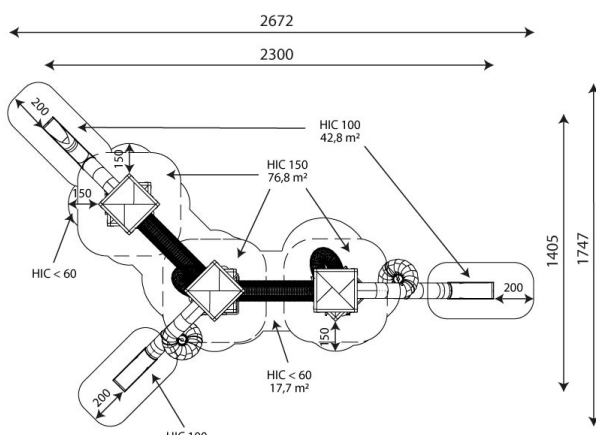

137,3 m²

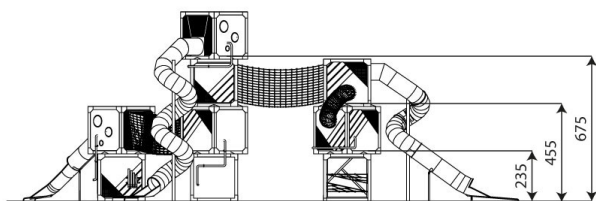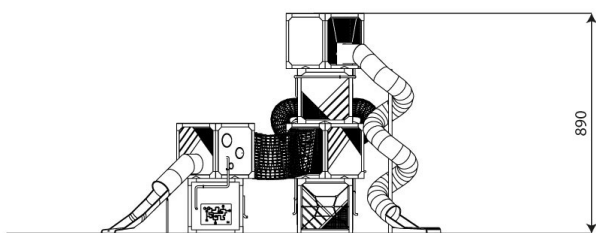

### Guarantee

**30**

30 year guarantee -  
Durability of steel and  
stainless steel  
structural elements

**15**

15 year guarantee - Durability  
of steel and stainless steel  
structures of mobile devices;  
durability of Robinia wood  
structural elements

**10**

10 year guarantee - Structural  
strength of HDPE, 100% recycled  
HDPE and HPL elements;  
structural elements made of  
100% recycled material  
(composite)

**5**

5 year guarantee - Corrosion resistance  
of stainless steel and hot-dip galvanized  
and powder-coated steel elements,  
resistance to bark beetles and rotting of  
wooden structural elements

Detailed information in the guarantee card

**Vinci Sp. z o.o.**  
Seminaryjna 9 Street  
99-400 Łowicz

VAT: 534-265-18-84  
PHONE: +48 42 203 24 99 ext. 26  
M: +48 793 404 991



biuro@vinci-play.com  
info@vinci-play.com  
[www.vinci-play.com](http://www.vinci-play.com)

## Surfaces according to EN 1176-1:2017+A1:2023

|                                 | Description (mm)             | Layer thickness (cm) | Maximum fall heights (cm) |
|---------------------------------|------------------------------|----------------------|---------------------------|
| Turf/ top layer of soil (A,B,C) | -                            | -                    | ≤100                      |
| bark (A,C)                      | Particle size from 20 to 80  | 30                   | ≤200                      |
|                                 |                              | 40                   | ≤300                      |
| woodchips (A,C)                 | Particle size from 5 to 30   | 30                   | ≤200                      |
|                                 |                              | 40                   | ≤300                      |
| sand or gravel (A,C)            | Particle size from 0,25 to 8 | 30                   | ≤200                      |
|                                 |                              | 40                   | ≤300                      |
| synthetic attested (A,B,C)      | Tested according to EN 1177  |                      | 150                       |

## Product technical sheet

# MAXX 2507

### Amount of safe surface corresponding with free fall height:

HIC <60 17,7 m<sup>2</sup>

HIC 100 42,8 m<sup>2</sup>

HIC 150 76,8 m<sup>2</sup>

Data is subject to change without prior notice.

