


MAXX 2505



4 - 14 years

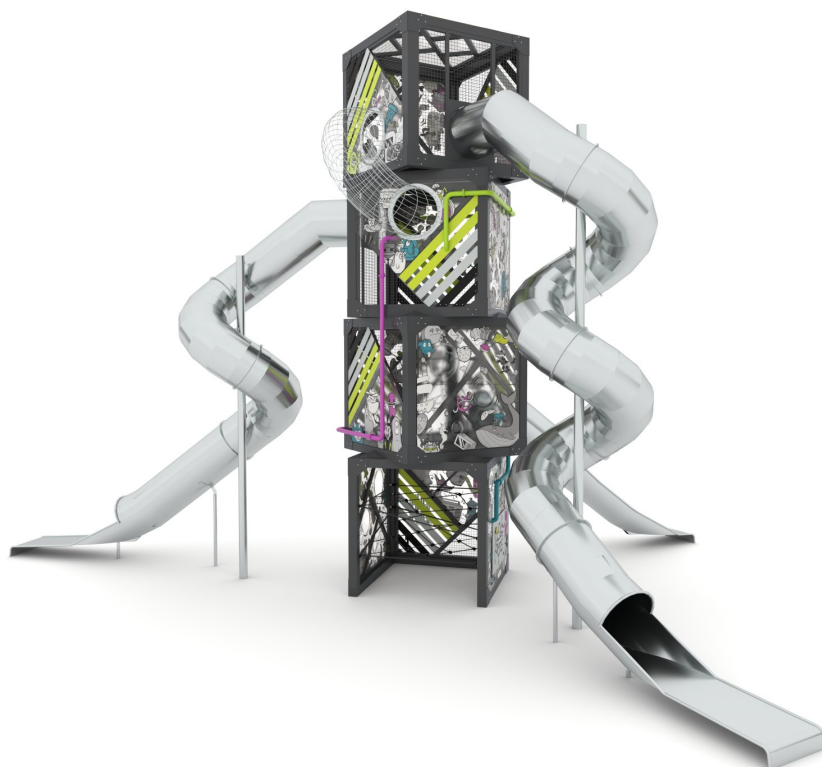

47 kids



74,5 m²



Material specification

- Hot-dip galvanized and powder coated construction of 140x140 mm profile,
- Platforms made of durable anti-slip and waterproof HPL plate,
- Transparent polycarbonate panels with a weather-resistant print,
- Covers made of hot-dip galvanized and powder coated steel mesh,
- Side panels made of durable HPL plate, resistant to weather conditions,
- Stainless steel tube slide,
- Moving elements made of durable HPL plate, resistant to weather conditions,
- Spherical windows made of polycarbonate,
- Musical panels made of stainless steel pipes, with a paddle made of certified, safe rubber attached,
- "Talking pipe" - a pipe made of hot-dip galvanized and powder-coated steel,
- Steel ropes in polypropylene braid, connected with durable plastic elements, stainless steel or aluminum,
- Calibrated stainless steel chains, preventing fingers entrapment,
- Stainless steel screws and/or screws covered with plastic caps,



Facilitating disability



sound stimulation



shelters



integration



Intellectual development



manipulation



music



thinking



Physical development



sliding



climbing





3
number of
slides



4
number of
interactive
elements



6
number of activity
elements

Product technical sheet

MAXX 2505


Product data

Length	1330 cm
Width	970 cm
Total height	890 cm
Age group	4 - 14 years
Number of users	47 kids
Safety zone	74,5 m ²
Free fall height	150 cm
The height of the platforms	235, 455, 675 cm
tube slide platform height	235, 560, 675 cm
In accordance with norm EN	1176-1:2017+A1:2023
Weight of the heaviest part	216 kg
Dimensions of the largest part	498x327x86 cm
Availability of spare parts	YES
Installation time	8 h



Data is subject to change without prior notice.

Additional information

- equipment adapted for the disabled; intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jamming the head, fingers or any other body parts;
- anchoring on flat surface, 80/70/60 cm deep;
- slide should not be installed southwards;
- render is for reference only, the actual appearance of the equipment and its color may vary;

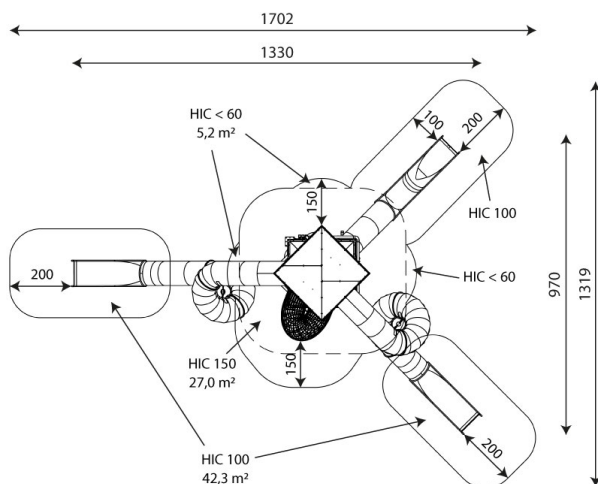

74,5 m²

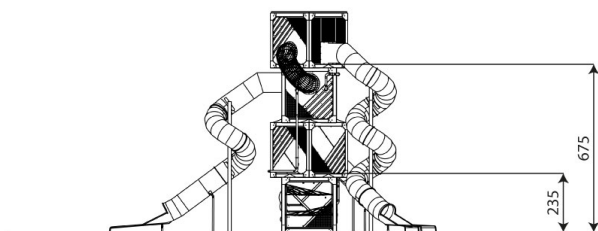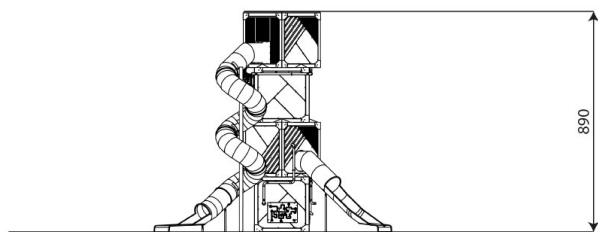

Guarantee

30

30 year guarantee -
Durability of steel and
stainless steel
structural elements

15

15 year guarantee - Durability
of steel and stainless steel
structures of mobile devices;
durability of Robinia wood
structural elements

10

10 year guarantee - Structural
strength of HDPE, 100% recycled
HDPE and HPL elements;
structural elements made of
100% recycled material
(composite)

5

5 year guarantee - Corrosion resistance
of stainless steel and hot-dip galvanized
and powder-coated steel elements,
resistance to bark beetles and rotting of
wooden structural elements

Detailed information in the guarantee card

Vinci Sp. z o.o.
Seminarnyja 9 Street
99-400 Łowicz

VAT: 534-265-18-84
PHONE: +48 42 203 24 99 ext. 26
M: +48 793 404 991



biuro@vinci-play.com
info@vinci-play.com
www.vinci-play.com

Surfaces according to EN 1176-1:2017+A1:2023

	Description (mm)	Layer thickness (cm)	Maximum fall heights (cm)
Turf/ top layer of soil (A,B,C)	-	-	≤100
bark (A,C)	Particle size from 20 to 80	30	≤200
		40	≤300
woodchips (A,C)	Particle size from 5 to 30	30	≤200
		40	≤300
sand or gravel (A,C)	Particle size from 0,25 to 8	30	≤200
		40	≤300
synthetic attested (A,B,C)	Tested according to EN 1177		150

Product technical sheet

MAXX 2505

Amount of safe surface corresponding with free fall height:

HIC <60 5,2 m²

HIC 100 42,3 m²

HIC 150 27,0 m²

Data is subject to change without prior notice.

